

# REVERSIBLE SHEETERS

## CG/SF MANUAL SERIES


The Heavy Duty design and construction of the CG/SF Manual Series Sheeters was specifically researched for use within demanding environments such as medium to high production bakeries or pastry shops.

G. CINELLI - ESPERIA CORPORATION Manual Sheeters come with complete Enamel Painted or optional Stainless Steel heavy-duty structures. Excellent for sheeting applications of all types of soft pastry dough as well as stiff pizza or other types of dough.

Oxidation resistant large diameter cylinders adjust for opening between .2mm to 40mm (.00787" to 1.6"). Belts are of varied speed from entrance to cylinders and exit from cylinders for exceptional fold free sheeting action. The differentiated speed of the belts between entry and exit, which is approximately 35%, avoids possible dough obstruction, stretching and tearing dough.

With an optional cutting station and two speed motor, the CG/SF 600 L/T allows for sheeting and cutting of various products such as croissants, round, oval, or other shapes (custom available) for pastry production.

Forward reverse action is controlled both via foot switch as well as by hand control on all models.

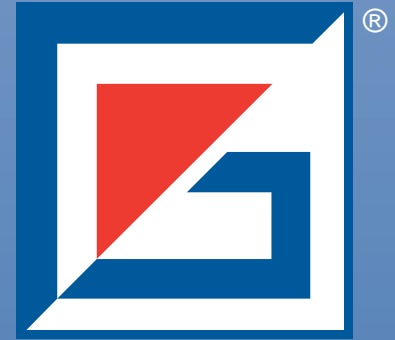

**CINELLI**  
**ESPERIA**  
CORPORATION


**Our Goal is Simple...  
To Help You Reach Yours**

Manufacturers of  
Quality Bakery Machinery  
Since 1972.



**CG/SF 600 L/T  
with Optional  
Stainless Steel  
Panels and Cutting  
Attachment**

G. CINELLI-ESPERIA CORPORATION: the standard by which all will be judged

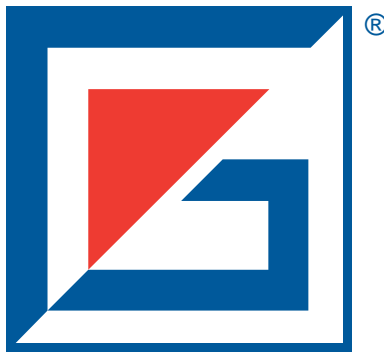

**TECHNICAL DATA**

**MANUAL SERIES REVERSIBLE SHEETERS**

**CG/SF SERIES**

MODELS	Working Surface Height	Conveyor Belt Dimensions **	Installed Power kW/Hp	Exit Conveyor Speed	Overall Dimensions
CG/SF 500L	88 cm	66 x 50 cm	.75	57 cm/sec	207 x 93 x 116 cm
	34 "	26" x 19 %"	.75	22 %"/sec	81% x 36% x 45 %"
CG/SF 600L	88 cm	140 x 60 cm	.75	57 cm/sec	343 x 103 x 116 cm
	34 "	38" x 27 %"	.75	22 %"/sec	135" x 40% x 45 %"
CG/SF 600L/T	88 cm	140 x 60 cm	.75	57 cm/sec	343 x 103 x 116 cm
	34 "	38" x 27 %"	.75	22 %"/sec	135" x 40% x 45 %"


Shipping Volume      2.7 Cubic Meters Max. Approx.      94 Cubic Feet Max. Approx

Weight	CG/SF 500 Models	CG/SF 600 Models
[kg]	295 Approx.	310 Approx.
[lb.]	651 Approx.	684 Approx.

Amperage [Amps] @ 220-3-60\*      3.8      3.8

- \* Standard Voltage: 220V-3Ph-60Hz. Other voltages available upon request.
- \* Shorter Conveyor Belt Versions Available. Please inquire.

DIMENSIONS = (L x W x H)  
Exterior dimensions are approximate.



ALL DATA NOT BINDING. G. CINELLI - ESPERIA CORPORATION® RESERVES THE RIGHT TO EFFECT CHANGES WITHOUT PRIOR NOTIFICATION.

**CINELLI**  
**ESPERIA**  
**CORPORATION**

**380 Chrislea Road,  
Woodbridge, Ontario  
L4L 8A8 Canada**

**Tel: (905) 856-1820; 850-1800**

**Fax: (905) 850-2989**

**Web Site: [www.gcinelli-esperia.com](http://www.gcinelli-esperia.com)**

Printed in Canada

fi DESIGNATED TRADEMARK REGISTERED IN  
CANADA, USA, MEXICO & RUSSIA  
OWNED BY G. CINELLI - ESPERIA CORPORATION